
Operating and installation instructions
Cooker hood

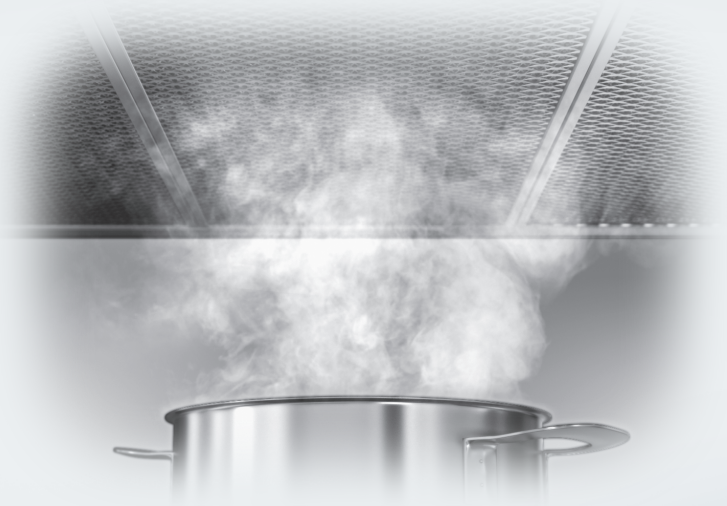

To prevent the risk of accidents or damage to the appliance, it is **essential** to read these instructions before it is installed and used for the first time.

en-GB

M.-Nr. 10 093 450

Contents

Warning and Safety instructions 4

Caring for the environment 13

Modes of operation 14
Con@ctivity 2.0 function 15

Guide to the appliance 16

Operation (Automatic mode) 18
Cooking with Con@ctivity 2.0 (Automatic mode) 18
Leaving automatic mode temporarily 20
Returning to automatic mode 20

Operation (Manual mode) 21
Cooking without Con@ctivity 2.0 (Manual mode) 21
Remote control 21
Switching the fan on 21
Selecting the power level 21
Selecting the run-on time 22
Switching the fan off 22
Switching the hob lighting on / off 22
Power management 23

Operation (Automatic and Manual modes) 24
Operating hours counters 24
Altering the operating hours counter for the grease filters 24
Activating and altering the charcoal filter operating hours counter 25
Reading the filter operating hours counter 25

Energy saving tips 26

Cleaning and care 27
Casing 27
Grease filters and edge extraction panels 28
Charcoal filters 31
Resetting the charcoal filter operating hours counter 31
Disposing of the charcoal filters 31
Remote control 32
Cleaning the remote control 32
Changing the battery 32

Installation 33
Before installation 33
Installation instructions 33

Contents

Appliance dimensions 34
Safety distance between hob and cooker hood (S) 36
Installation recommendations 37

Connection for air extraction 38
Silencer 39

Electrical connection 40

Activating Con@ctivity 2.0 41
Installing the Con@ctivity 2.0 Stick 41
Activating Con@ctivity 2.0 41
- Activating the cooker hood 41
- Activating the hob 42
- Activation failed 42

Deactivating Con@ctivity 2.0 42

Signing on/off the remote control 43

After Sales / Guarantee 45
Position of the data plate 45

Technical data 46
Conformity declaration 46
Data sheet for household cooker hoods 47
Data sheet for household cooker hoods 48

This appliance complies with all relevant local and national safety requirements. Inappropriate use can, however, lead to personal injury and damage to property.

To avoid the risk of accidents and damage to the appliance, please read these instructions carefully before using it for the first time. They contain important notes on the safety, installation, use and maintenance of the appliance. Miele cannot be held liable for non-compliance with these instructions.

Keep these instructions in a safe place and ensure that all users are familiar with the contents. Pass them on to any future owner of the appliance.

Correct application

▶ This cooker hood is intended for use in domestic households and similar working and residential environments.

▶ The cooker hood is not intended for outdoor use.

▶ It must only be used as a domestic appliance to extract vapours and remove odours from cooking.
Any other usage is not supported by the manufacturer and could be dangerous.

▶ Where a recirculation cooker hood is fitted above a gas hob, please ensure that there is an adequate supply of fresh air into the room in which it is installed. Please seek the advice of a qualified gas fitter (e.g. GasSafe in the UK) if necessary.

▶ The cooker hood can only be used by people with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, if they are supervised whilst using it, or have been shown how to use it in a safe way and recognise and understand the consequences of incorrect operation.

Safety with children

▶ Children under 8 years of age must be kept away from the cooker hood unless they are constantly supervised.

▶ Children 8 years and older may only use the cooker hood unsupervised if they have been shown how to use it safely and recognise and understand the consequences of incorrect operation.

▶ Children must not be allowed to clean or maintain the cooker hood unsupervised.

▶ Please supervise children in the vicinity of the cooker hood and do not let them play with it.

▶ Danger of suffocation. Packaging, e.g. plastic wrappings, must be kept out of the reach of babies and children. Whilst playing, children could become entangled in packaging or pull it over their head and suffocate.

▶ Keep the battery for the remote control out of the reach of children.

Technical safety

▶ Unauthorised installation, maintenance and repairs can cause considerable danger for the user. Installation, maintenance and repairs must only be carried out by a Miele authorised technician.

▶ A damaged appliance can be dangerous. Check it for visible signs of damage. Do not use a damaged appliance.

▶ The electrical safety of this appliance can only be guaranteed when correctly earthed. It is essential that this standard safety requirement is met. If in any doubt please have the electrical installation tested by a qualified electrician.

▶ Reliable and safe operation of this cooker hood can only be assured if it has been connected to the mains electricity supply.

▶ Before connecting the appliance to the mains supply, ensure that the connection data on the data plate (voltage and frequency) match the mains electricity supply. This data must correspond in order to avoid the risk of damage to the appliance. Consult a qualified electrician if in any doubt.

▶ Do not connect the appliance to the mains electricity supply by a multi-socket unit or an extension lead. These are a fire hazard and do not guarantee the required safety of the appliance.

▶ For appliances with an external motor fitted (...EXT models) the connection of the two units must be made using the connection cable and the plug connectors.
These models may only be combined with a Miele external motor.

▶ For safety reasons, this appliance may only be used after it has been built in.

▶ The cooker hood must not be used in a non-stationary location (e.g. on a ship).


▶ Tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults.
Only open the housing as described in the instructions given in the installation sheet and in the Cleaning and care section of this booklet. Under no circumstances should any other parts of the housing be opened.

▶ The manufacturer's warranty will be invalidated if the appliance is not repaired by a Miele approved service technician.

▶ Miele can only guarantee the safety of the appliance when genuine original Miele replacement parts are used. Faulty components must only be replaced by Miele spare parts.

▶ During installation, maintenance and repair work, the appliance must be disconnected from the mains electricity supply.

Using at the same time as other heating appliances that depend on the air from the room

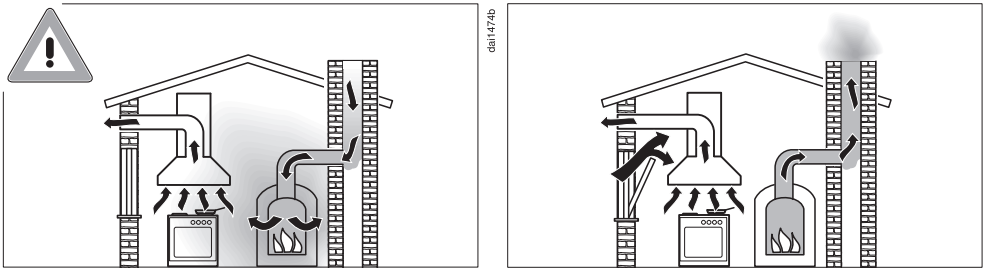

⚠ Warning - danger of toxic fumes
Great care should be taken when using the cooker hood at the same time and in the same room or area of the house as another heating appliance which depends on the air in the room.
Such appliances include gas, oil, wood or coal-fired boilers and heaters, continuous flow or other water heaters, gas hobs, cookers or ovens which draw air in from the room and duct exhaust gases out through a chimney or extraction ducting.

When used in extraction mode, with or without an external motor fitted, or in recirculation mode with a recirculation box installed outside the room, the appliance draws air in from the room in which it is installed and from neighbouring rooms.

If there is insufficient air, an underpressure will occur. The heating appliance will be starved of oxygen, impairing combustion. Harmful gases could be drawn out of the chimney or extraction ducting back into the room, with potentially fatal consequences.

In order to ensure safe operation, and to prevent gases given off by the heating appliances from being drawn back into the room when the cooker hood and the heater are in operation simultaneously, an underpressure in the room of 0.04 mbar (4 pa) is the maximum permissible.

Ventilation can be maintained by air inlets which cannot be blocked, in windows, doors or outside wall vents, or by other technical measures, such as ensuring that the cooker hood can only be switched on when the heating appliance is switched off or vice versa. A ventilation brick alone is not generally sufficient to ensure safe ventilation.

The overall ventilation condition of the dwelling must be taken into account. If in any doubt, the advice of a competent builder or, for gas a qualified gas fitter (registered with an official gas safety body in accordance with national safety regulations, GasSafe in the UK) must be sought.

If the cooker hood is used in recirculation mode, where the air is directed back into the room in which it is located, operating a heating appliance which depends on the room air at the same time is no cause for concern.

Correct use

▶ Never use a naked flame beneath the cooker hood. To avoid the danger of fire, do not flambé or grill over a naked flame.
When switched on, the cooker hood could draw flames into the filter. Fat deposits could ignite, presenting a fire hazard.

▶ The cooker hood can become damaged when exposed to excessive heat.

– When using the cooker hood over a gas hob, ensure that any burners in use are always covered by a pan. Switch the cooking zone off when a pan is removed, even for a short time.
– Select a pan which is suitable for the size of the burner.
– Regulate the flame so that it does not burn up the sides of the pan.
– Avoid overheating the pan (e.g. when cooking with a wok).

▶ Always switch the cooker hood on when a cooking zone is in use, otherwise condensation may collect in the hood, which could cause corrosion.

▶ When cooking with oil or fat, chip pans and deep fat fryers etc, do not leave the pans unattended. Never leave an open grill unattended when grilling. Overheated oil and fat can ignite and could set the cooker hood on fire.

▶ Do not use the cooker hood without the filters in place. This way you will avoid the risk of grease and dirt getting into the appliance and hindering its smooth operation.

▶ The cooker hood can get very hot during cooking due to heat rising from the hob.
Do not touch the housing or the grease filters until the cooker hood has cooled down.

Correct installation

▶ Refer to the cooker or hob manufacturer's instructions as to whether a cooker hood may be operated above the cooker/hob.

▶ Safety regulations prohibit the fitting of a cooker hood over solid fuel stoves.

▶ Insufficient distance between the cooker or hob and the cooker hood can result in damage to the hood.
The minimum safety distances between the top of the cooker or hob and the bottom of the cooker hood given in the "Installation" section must be maintained, unless the hob manufacturer states that a greater distance is required.
If more than one cooking appliance is fitted beneath the cooker hood, and they have different minimum safety distances to the cooker hood, select the greater distance.

▶ The distances given in "Installation" must be observed when fitting the cooker hood.

▶ Exhaust ducting must be of non-inflammable material. Suitable material is available from Miele specialist dealers or the Miele Spares Dept.

▶ The appliance must not be connected to a chimney or flue which is in use. Neither should it be connected to ducting which ventilates rooms with fireplaces.

▶ If exhaust air is to be extracted into a chimney or ventilation duct no longer used for other purposes, seek professional advice.

Cleaning and care

▶ There is a risk of fire if the cooker hood is not cleaned as described in these operating instructions.

▶ Do not use a steam cleaning appliance to clean this appliance. The steam could reach electrical components and cause a short circuit.

▶ Important information on handling the remote control battery:

– Do not short circuit or recharge the battery, or throw it into a fire. Danger of explosion.
– Do not throw old batteries away with your general household waste. Please dispose of them in a designated battery collection and recycling system.

Accessories

▶ Only use genuine original Miele accessories with this appliance. Using accessories from other manufacturers will invalidate the guarantee, and Miele cannot accept liability.


Disposal of the packing material

The packaging is designed to protect the appliance from damage during transportation. The packaging materials used are selected from materials which are environmentally friendly for disposal and should be recycled.

Recycling the packaging reduces the use of raw materials in the manufacturing process and also reduces the amount of waste in landfill sites.

Disposal of your old appliance

Electrical and electronic appliances often contain valuable materials. They also contain materials which, if handled or disposed of incorrectly, could be potentially hazardous to human health and to the environment. They are, however, essential for the correct functioning of your appliance. Please do not therefore dispose of it with your household waste.



Please dispose of it at your local community waste collection / recycling centre or contact your Dealer for advice.

Ensure that it presents no danger to children while being stored for disposal.

Modes of operation

Depending on the model of the cooker hood, the following options are available:

Extraction mode

The cooking vapours are drawn in by the cooker hood. The air is passed via the edge extraction panels through the grease filters, cleaned and then directed outside.

Non-return flap

The non-return flap is designed to prevent the exchange of room and outside air taking place.
The flap is closed when the cooker hood is switched off.
When the cooker hood is switched on, the non-return flap opens for the cooking vapours to be blown directly outside.

If the on-site ventilation system does not have a non-return flap, the non-return flap supplied must be fitted in the exhaust socket in the motor unit.

Recirculation mode

(DUU 2900 conversion kit required)

The air is drawn in through the edge extraction panels and then cleaned by the grease filters. It is then directed into the recirculation box where it is also cleaned by the charcoal filters. The cleaned air is then recirculated back into the kitchen.

Operation with an external motor


(...EXT model cooker hoods)

Cooker hoods set up for operation with an external motor have to be connected to a Miele external motor located in a suitable position outside the room in which the cooker hood is installed. The external motor is linked to the cooker hood via a connection cable and then operated using Con@ctivity 2.0 or via the controls on the cooker hood or the remote control.

Con@ctivity 2.0 function

Automatic control

The cooker hood has a communication facility which enables the automatic operation of the cooker hood depending on the operational state of the hob.

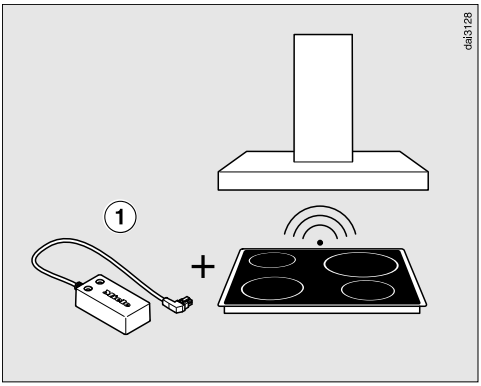

To make use of the communication facility the hob must be fitted with a Con@ctivity 2.0 Stick ①.

Refer to the installation instructions for the Con@ctivity 2.0 Stick to check whether it is compatible with your hob.


To use the Con@ctivity 2.0 function, a wireless connection must be established between the hob and the cooker hood (see "Activating Con@ctivity 2.0").

The hob transmits information about its operational status via a wireless signal to the cooker hood.

– When the hob is switched on, the hob lighting comes on independently and then after a short time the fan also comes on.
– During cooking the cooker hood automatically sets the power level according to the number of cooking zones in operation and their power levels.
– After switching the hob off the fan and the hob lighting will switch off automatically after a specified period of time.

See "Operation" for detailed information about this function.

Guide to the appliance

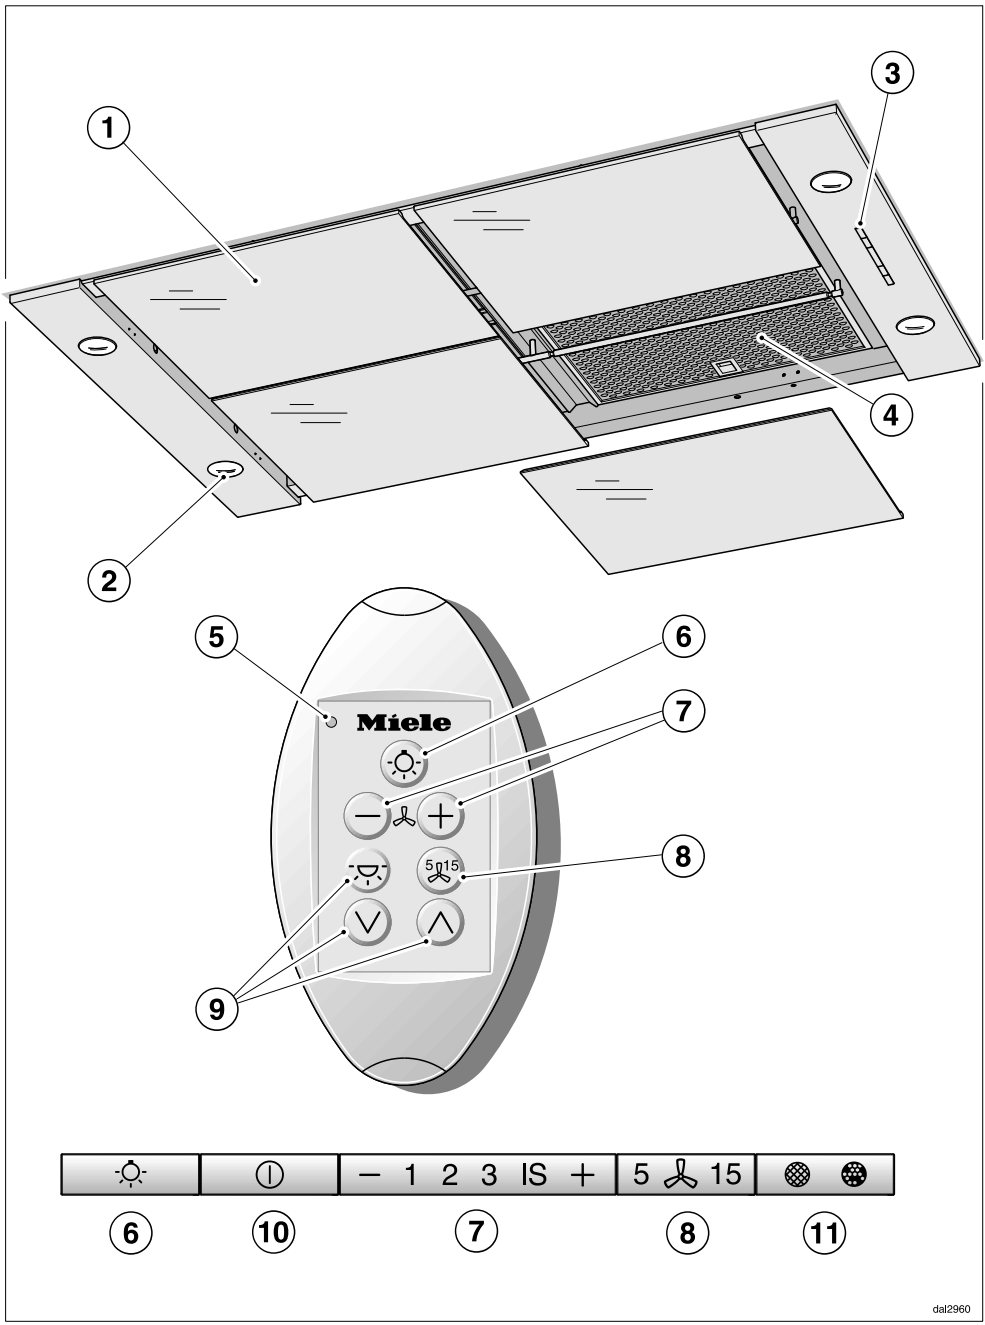

① Edge extraction panels
Optional accessories
DRP 2900 Glass (4 panels)
DRP 2900 Stainless steel (4 panels)

② Hob lighting

③ Controls

④ Grease filters

⑤ Indicator light

⑥ Hob lighting control

⑦ Controls to select the fan power level
The controls on the remote control are also used to switch the fan on and off.

⑧ Run-on option control

⑨ Controls for programming

⑩ On/Off control for the fan

⑪ Operating hours control

When Con@ctivity 2.0 is activated, the cooker hood always works in automatic mode (see "Activating Con@ctivity 2.0").

To operate the cooker hood manually, see "Cooking without Con@ctivity 2.0".

Cooking with Con@ctivity 2.0 (Automatic mode)

- Switch a cooking zone on at the power level you want.


The cooker hood lighting will come on.

After a few seconds the fan will come on, first at power level **2**, then it will switch immediately to power level **1**.

The cooker hood selects the power level automatically during cooking.

This is determined by the total output of the hob, i.e, the number of cooking zones in operation and the power levels selected.

- If you select a higher power level or are using several cooking zones, the cooker hood will switch to a higher power level.
- When you reduce the power level or the number of cooking zones on the hob, the cooker hood power level is also reduced.

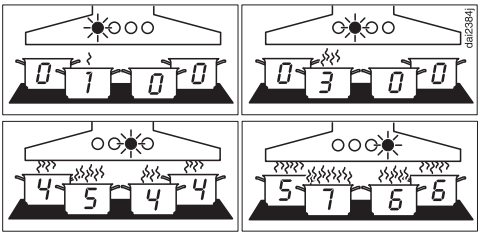

Examples for power levels **1** to **4**

Reaction time

The cooker hood reacts with a slight delay because altering the power level on the hob does not immediately result in a reduction or increase in cooking vapours.

Because the hob transmits the information to the cooker hood at intervals, this can also cause delays.

The reaction can vary from a few seconds to a couple of minutes.

Cooking process

■ If for example you switch on a cooking zone at the highest power level to heat a pan for frying and reduce the power level after approx. 60 to 90 seconds*, a cooking process is recognised (*60 seconds to 5 minutes for a HiLight hob).

The cooker hood switches itself on and when the hob power level has been reduced, the hood switches to power level 3 and remains at that level for approx. 5 minutes.

After that the cooker hood power level is determined automatically by the Con@ctivity function.

■ You can select another power level manually before then.

Switching off

■ Switch off all cooking zones.

The cooker hood fan will reduce its power level over the next few minutes and will eventually switch itself off.

This helps to neutralise any lingering vapours and odours in the air.

– From the intensive setting 4, the fan switches immediately to level 3.

– If the fan is operating at level 3, it will switch to level 2 after approx. 1 minute.

– From level 2, the fan switches to level 1 after 2 minutes.

– After 2 minutes at level 1 the fan switches itself off.

– After another 30 seconds the lighting switches off.

The cooking process is then finished.

Leaving automatic mode temporarily

To leave automatic mode temporarily during cooking:

- Manually select a different power level, or
- Manually switch the cooker hood off, or
- Activate the run-on option 5 15 on the cooker hood. The fan will switch off after the selected time and the lighting remains switched on.

The cooker hood can now be operated manually (see "Cooking without Con@ctivity 2.0").

Returning to automatic mode

The cooker hood returns to automatic mode:

- if the cooker hood has not been used for approx. 5 minutes after selecting a power level manually, or
- if the manually selected fan power level corresponds to the automatic one again, or
- if the cooker hood fan and the hob have been switched off for at least 30 seconds.
  Automatic mode will resume next time the hob is switched on.
- If you wish to operate the cooker hood manually for a complete cooking process, switch on the cooker hood fan **before** switching on the hob.
  If the cooker hood and the hob have been switched off for at least 30 seconds after cooking, automatic mode will resume the next time the hob is switched on.

Cooking without Con@ctivity 2.0 (Manual mode)

The cooker hood can be operated manually if:

– Con@ctivity 2.0 is not activated.

– You have temporarily deactivated Con@ctivity 2.0 (see "Leaving automatic mode temporarily").

Remote control

The main functions can be selected via the cooker hood or by remote control. The LED light on the remote control unit will light up briefly when a function is selected by remote control.

The maximum operating range of the remote control is approx. 10 m. However, this may be less depending on the physical conditions present in the room (e.g. furniture, walls).

The rear of the remote control unit is magnetic which allows it to be attached to various metal surfaces.

Switching the fan on

■ Press the On/Off control ⏻.

The fan will switch on at level **2**. The ⏻ symbol and **2** will light up in the power level display.

Selecting the power level

For light to heavy cooking vapours and odours, select from power levels **1** to **3**.

When frying or cooking food with a very strong aroma, select the Intensive setting **IS**.

■ For a lower power level, press the "—" control, or "+" for a higher level.

Reducing power on the intensive setting

If Power management is activated (default), the fan automatically switches to level **3** after 5 minutes.

Selecting the run-on time

It is advisable to run the fan for a few minutes after cooking has finished to neutralise any lingering vapours and odours in the air.
With the run-on option the fan switches itself off automatically after a pre-selected time.

■ After you have finished cooking, press the run-on option control **5** **15**

– Once: the fan will switch itself off after 5 minutes (**5** lights up).

– Twice: the fan will switch itself off after 15 minutes (**15** lights up).

– If you press the run-on option control **5** **15** again, the fan will remain on (**5** **15** will go out).

Switching the fan off

■ Use the On/Off control ⏻ to switch the fan off.

The ⏻ symbol will go out.

Switching the hob lighting on / off

The hob lighting can be switched on and off independently of the fan.

■ To do this, press ☼.

The ☼ symbol will light up when the hob lighting is switched on.

Power management

The cooker hood features a power management system to help save energy. The fan power level is reduced and the lighting is switched off automatically.

– If the Intensive setting is selected, the fan automatically switches to level 3 after 5 minutes.

– From levels 3, 2 or 1 the power will be reduced by one level after 2 hours and then in 30 minutes stages until the fan finally switches off.

– The hob lighting will switch off automatically after 12 hours.

You can deactivate Power management.
This can only be done via the control panel on the cooker hood. It cannot be deactivated using the remote control. Deactivating Power management can result in increased electricity consumption.

Switching Power management on/off

You can deactivate Power management.
This can result in increased electricity consumption.

■ Switch off the fan and the lighting.

■ Press the run-on option button **5** **15** for approx. 10 seconds, until **1** lights up in the power level display.

■ Then press in turn,

– the lighting button ☼,

– the "—" button and then

– the lighting button ☼ again.

If Power management is switched on, the **1** and **IS** indicators will light up constantly.
If it is switched off, **1** and **IS** will flash.

■ Press "—" to switch Power management off.

The **1** and **IS** indicators will flash.

■ To switch it on, press "+".

The **1** and **IS** indicators will light up constantly.

■ Confirm the setting with the run-on option button **5** **15**.

All the indicator lamps will go out

If you do not confirm within 4 minutes, the cooker hood will revert to the old setting.

Operating hours counters

The number of hours the appliance has been in operation is stored in memory.

When the Grease filter symbol or the Charcoal filter symbol lights up, the operating hours counters are signalling that the filters need to be cleaned or changed. Further information about cleaning and changing the filters and resetting the operating hours counter can be found under "Cleaning and care".

The operating hours counter settings described in the following section can only be carried out using the control panel on the cooker hood. They cannot be carried out via the remote control.

Altering the operating hours counter for the grease filters

You can set the operating hours counter for the grease filters to suit the type of cooking you do.

The grease filter operating hours counter is set at the factory for 30 hours.

– Select a shorter time of 20 hours if you roast or fry a lot.

– If you only cook occasionally we recommend that you still select a short time because grease which has built up gradually over a long period of time will harden on the filters and make cleaning more difficult.

– Select a longer time of 40 or 50 hours if you use very little fat for cooking.

■ Use the On/Off control ⏻ to switch the fan off.

■ Press the run-on control **5**⁂**15** and the operating hours control at the same time.

The grease filter symbol and one of the fan power level indicators flash.

Fan power level indicators **1** to **IS** show the time set:

1..... 20 hours

2..... 30 hours

3..... 40 hours

IS ..... 50 hours

■ Press the "—" symbol for a shorter operating time, or the "+" symbol to select a longer operating time.

■ Confirm the selection by pressing the operating hours control .

All the indicators will go out

If you do not confirm within 4 minutes, the cooker hood will revert to the old setting.

Activating and altering the charcoal filter operating hours counter

Charcoal filters are needed for recirculation mode.

The charcoal filter operating hours counter needs to be activated once and the operating time needs to be set to suit the kind of cooking you do:

- Use the On/Off control ⏻ to switch the fan off.
- Press the "+" symbol and the operating hours control at the same time.

The Charcoal filter symbol and one of the fan power levels will flash.

Fan power level indicators **1** to **IS** show the time set:

1 ..... 120 hours

2 ..... 180 hours

3 ..... 240 hours

IS ..... Deactivated

- Press the "−" symbol for a shorter operating time, or the "+" symbol to select a longer operating time.
- Confirm your choice by pressing the operating hours control .

All the indicator lamps will go out.

If you do not confirm within 4 minutes, the cooker hood will revert to the old setting.

Reading the filter operating hours counter

To check the percentage of time set already used

- Use the On/Off control ⏻ to switch the fan on.
- Press and hold the operating hours control
  - Once, to read the Grease filter operating hours. The grease filter symbol lights up.
  - Twice, to read the Charcoal filter operating hours. The Charcoal filter symbol lights up.

One or more of the power level indicators will flash.

The number of fan power level indicators flashing shows the percentage of the operating time which has already been used up.

1 ..... 25 %

1 and **2** ..... 50 %

1 to **3** ..... 75 %


1 to **IS** ..... 100 %

The number of operating hours used remains in the memory, even when the appliance is switched off or there is a power cut.

Energy saving tips

This cooker hood operates very efficiently and economically. The following will help you to save even more energy when using it:

- Ensure that there is sufficient ventilation in the kitchen when cooking. In extraction mode, if there is insufficient air flow the cooker hood cannot operate efficiently and this causes increased operating noise levels.
- Always cook with the lowest possible setting. This produces fewer cooking vapours, so you can use a lower cooker hood power level and therefore benefit from reduced energy consumption.
- Use the Con@ctivity function. The cooker hood will switch on and off automatically at the optimum power level for the cooking you are doing, which ensures low energy consumption.
- If you are operating the cooker hood manually, please note the following:
  - Check the power level selected on the cooker hood. A lower power level is generally sufficient for the majority of cooking. Only use the intensive setting when necessary.
  - When a large volume of cooking vapours are being produced, switch to a high power level in good time. This is more efficient than operating the cooker hood for longer to try to capture cooking vapours which have already been distributed throughout the kitchen.
  - Make sure that you switch the cooker hood off after use.
    If cooking vapours and odours still need to be removed from the kitchen air after cooking, use the run-on function. The fan will switch off automatically after the selected run-on time.
- Clean or change the filters at regular intervals. Heavily soiled filters reduce performance, increase the risk of fire and are unhygienic.

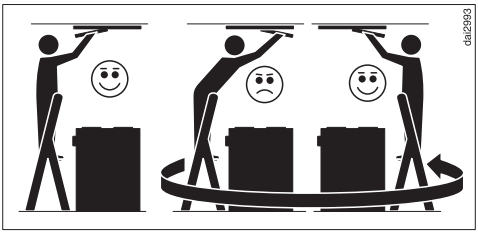

Before cleaning the cooker hood, please note the following:

Make sure that you use a stable and secure ladder.

Make sure that you stand on the ladder in a safe way.

Do not lean over the hob.

Do not stand on the worktop or the hob.

Casing

General information

The surfaces and controls are susceptible to scratches and abrasion.

Please observe the following cleaning instructions.

- All external surfaces and controls can be cleaned using hot water with a small amount of washing-up liquid applied with a well wrung-out soft sponge or cloth.

Do not let moisture get into the cooker hood.

Only use a damp cloth when cleaning. This is particularly important around the controls.

- After cleaning, wipe the surfaces dry using a soft cloth.

Do not use:

– cleaning agents containing soda, acids, chlorides or solvents,

– abrasive cleaning agents, e.g. powder cleaners or cream cleaners and abrasive sponges, as well as pot scourers or sponges which have been used previously with abrasive cleaning agents. These will damage the surface material.

Important for appliances with stainless steel surfaces

(This information does not apply to the controls).

- Stainless steel surfaces can be cleaned with a proprietary non-abrasive cleaning agent designed specifically for use on stainless steel.
- To help prevent re-soiling, a proprietary conditioning agent for stainless steel (available from Miele) can also be used. Follow the manufacturer's instructions on the packaging.

Important for the controls

Do not leave soiling on the controls for any length of time.
Otherwise they may suffer discolouration or damage.
Remove soiling straight away.

- Please observe the general notes on cleaning earlier in this section.

Do not use stainless steel cleaning agents on the controls.

Grease filters and edge extraction panels

The edge extraction panels and the re-usable metal grease filters in the appliance remove solid particles (grease, dust, etc.) from the kitchen vapours, preventing soiling of the cooker hood.

⚠ An oversaturated filter is a fire hazard.

Cleaning interval

Grease which builds up on the edge extraction panels and grease filters can harden over a long period of time and make cleaning more difficult. For this reason we recommend cleaning the panels and grease filters every 3–4 weeks.

The operating hours counter will remind you to clean the edge extraction panels and the grease filters regularly via the grease filter symbol which will light up.

- You can set the operating hours counter to suit the type of cooking you do (see "Operation").


Removing the panels and grease filters

The panels and the grease filters need to be removed for cleaning. During cooking, condensation forms on the panels which evaporates after cooking. To avoid this dripping on you, do not remove the panels for approximately two hours after cooking has finished.


The panels and grease filters can fall out when you are handling them.

This can result in damage.

Make sure you hold the panels and grease filters securely at all times when handling them.

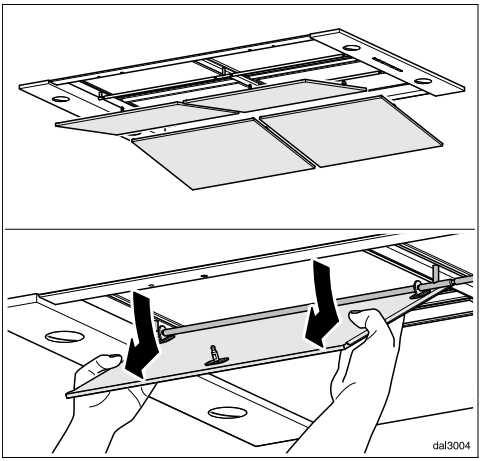

- To remove a panel, hold it at the sides, as shown. Pull it downwards out of the front locking clip, unhook it at the back and remove it.

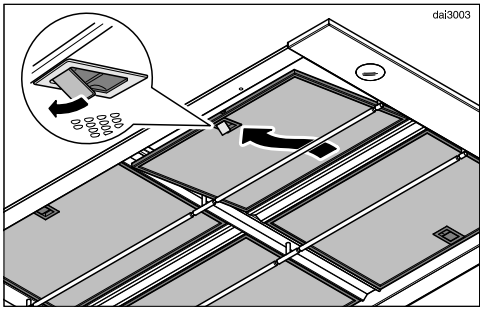

- To take out a grease filter, release the locking clip on the filter, lower the filter slightly, unhook it at the back and remove it.

Cleaning the panels by hand

- Follow the instructions under "Housing".

Cleaning the grease filters by hand

- Clean the filters with a soft nylon brush in a mild solution of hot water and a small amount of washing-up liquid. Do not use "neat" washing up liquid.

Unsuitable cleaning agents

Unsuitable cleaning agents can cause damage to the surface of the filters if used regularly.
Do not use:

– cleaning agents containing descaling agents

– powder cleaners, cream cleaners

– aggressive multi-purpose cleaning agents or spray cleaners for grease

– oven sprays


Cleaning the panels and grease filters in the dishwasher

- Place the panels and the grease filters as upright as possible or at a slight angle in the lower basket, with the short sides upright, ensuring the spray arm is not obstructed.
- Use a proprietary household dishwasher detergent.
- Select a dishwasher programme with a wash temperature between 50°C and 65°C.


Depending on the dishwasher detergent used, cleaning the filters in a dishwasher can cause permanent discolouration to the surface. However, this will not affect the functioning of the filters in any way.

After cleaning

- After cleaning, leave the filters to dry on an absorbent surface before replacing them.
- When removing the panels and filters for cleaning, also clean off any residues of oil or fat from the now accessible parts of the casing to prevent the risk of these catching fire.
- Replace the grease filters, making sure that the locking clips are facing down towards the hob.

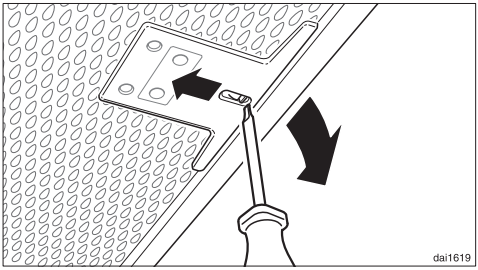

- If a grease filter is inadvertently replaced upside down, insert a small screwdriver blade into the slit to disengage the clip.

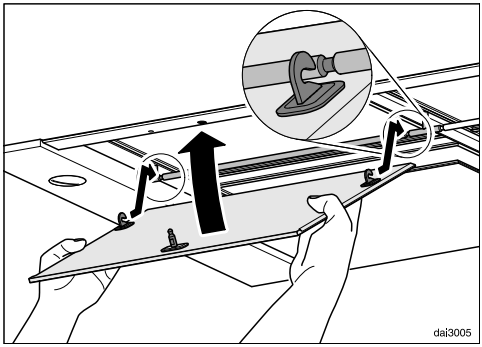

- To replace a panel, hold it firmly with both hands, hook it over the retaining bar (see detail in the illustration).
- Tilt the panel upwards at the front and press it into the locking clip until it clicks into position.

Resetting the grease filter operating hours counter

After cleaning, the operating hours counter needs to be re-set.

- Whilst the fan is switched on, press the operating hours control for approx. 3 seconds, until only the **1** is flashing.

The grease filter symbol goes out.

If you want to clean the grease filter(s) before the operating hours counter has reached its maximum,

- Press the operating hours control for approx. 6 seconds, until only the **1** is flashing.

Charcoal filters

With recirculation mode, two charcoal filters must be fitted in addition to the grease filters. These are designed to absorb cooking odours.
The charcoal filters are inserted in the separate recirculation unit.

- When fitting for the first time, activate the operating hours counter (see "Operation").

When to change the charcoal filters

- Always replace the charcoal filters when they no longer absorb kitchen odours effectively.
  They should, however be replaced at least every 6 months.

The charcoal filter operating hours symbol will light up to remind you to change the charcoal filters.

- The charcoal filter operating hours counter needs to be activated before using for the first time (see "Operation").

Resetting the charcoal filter operating hours counter

After changing the charcoal filters, the operating hours counter needs to be re-set.

- To do this, with the fan switched on, press the operating hours control once, then press it again and hold it for approx. 3 seconds until only the **1** is flashing. The Charcoal filter symbol will go out.

If you want to replace the charcoal filters **before** the operating hours counter has reached its maximum:

- Press the operating hours control twice and hold it for approx. 6 seconds until only the **1** is flashing.

Disposing of the charcoal filters

- Used charcoal filters can be disposed of with the normal household waste.

Remote control

Cleaning the remote control


- Only clean the surface with a damp cloth. Do not use too much water to avoid moisture penetrating the casing.

Changing the battery

Use only the type of battery listed. Do not use rechargeable batteries.

The remote control requires one 3 V CR 2032 battery.

The battery must be changed if cooker hood functions can no longer be selected using the remote control or if the LED light on the remote control does not light up, or only lights up dimly when a control is pressed. Cooker hood functions can still be selected using the cooker hood controls.

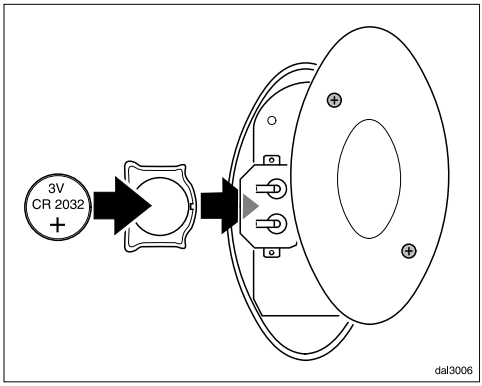

- Use a screwdriver to loosen the two screws on the back and remove the cover.
- Remove the old battery and replace with a new one, making sure the polarity is correct.
- Replace the cover.
- Dispose of the old battery responsibly.

Before installation


⚠ Before installation, it is important to read the information given on the following pages as well as the "Warning and Safety instructions" at the beginning of this booklet.

Installation instructions

See enclosed Installation sheet for instructions on how to install this appliance.

Installation

Appliance dimensions

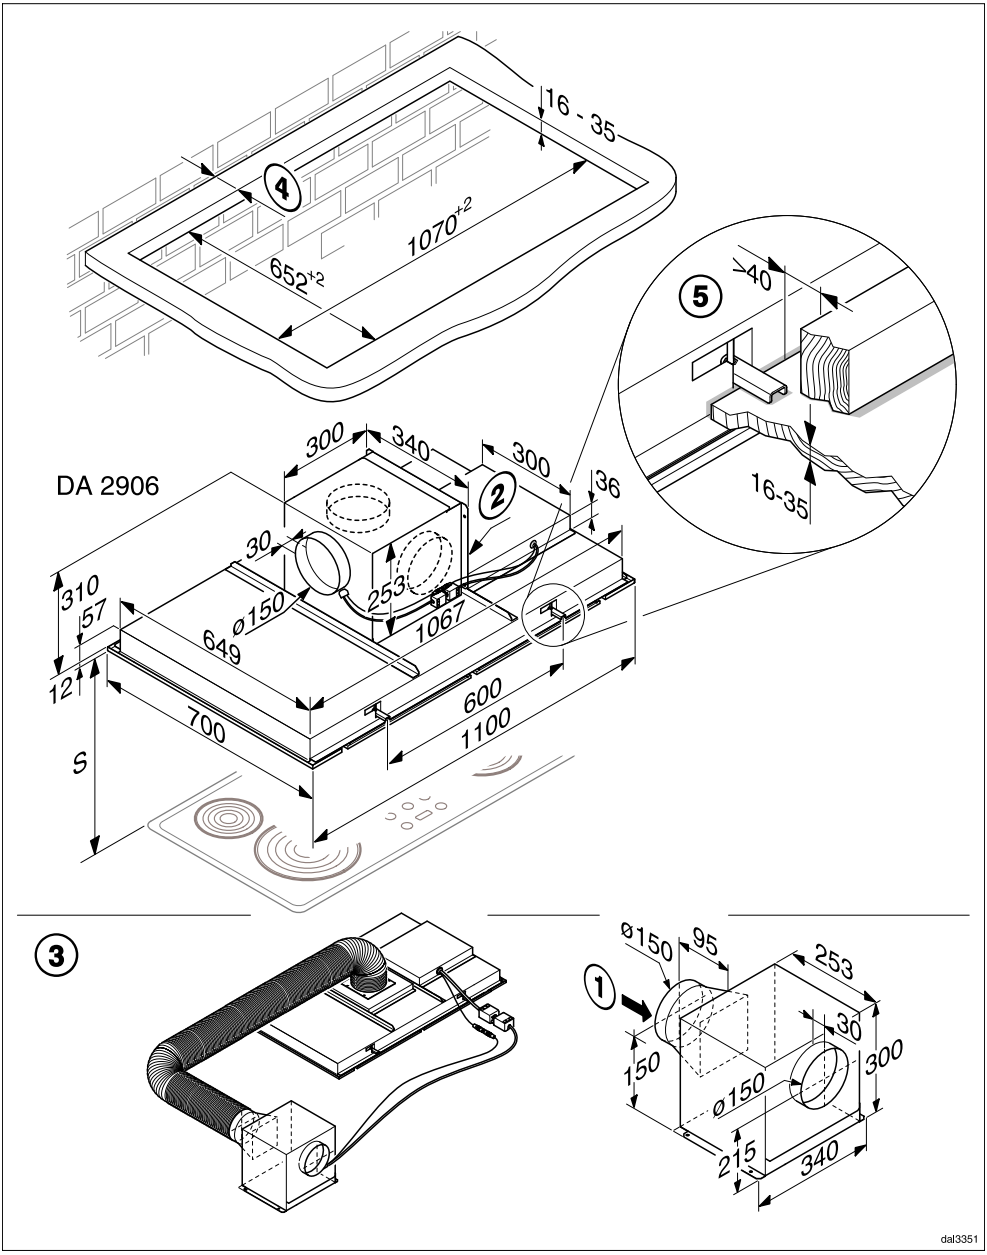


① Suction side

② Motor can be rotated. Exhaust socket can be fitted at the top or the sides in any direction.

③ The motor can be freely positioned. Connection to the appliance is via the exhaust ducting and the connection cable. Connection cable length: max. 1800 mm.

④ If the cooker hood is being installed near to a wall, a minimum distance of at least 50 mm must be observed so that the edge extraction panels and the grease filters can be removed easily.

⑤ The cooker hood is secured in the cut-out by clamps. This requires that the ceiling is made of a solid material, such as wood. Make sure that the material is strong enough to bear the weight of the cooker hood. There must be a minimum distance of 40 mm between the areas around the clamps and any structures or components, such as struts or cables.

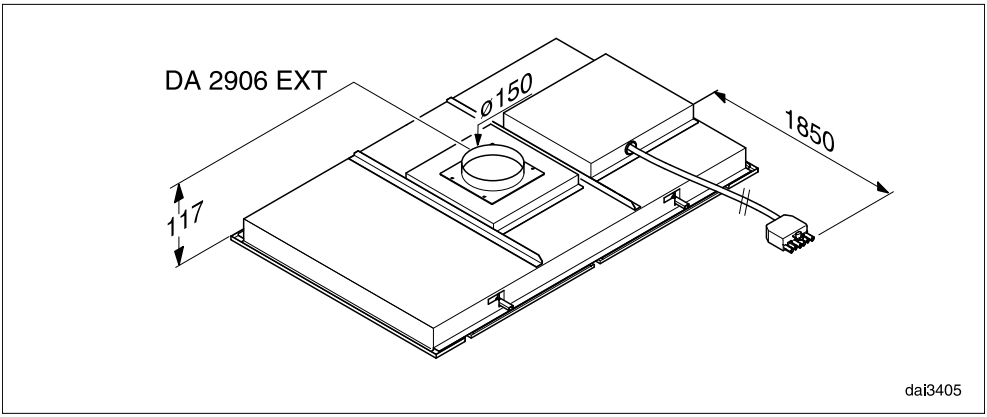

DA 2906 EXT - different appliance dimensions

Safety distance between hob and cooker hood (S)

When planning the installation height of your cooker hood, the minimum safety distance between the top of a cooker or hob and the bottom of the cooker hood is as follows, unless a greater distance is specified by the manufacturer of your cooking appliance.
See "Warning and Safety" instructions for further information.

Cooking appliance	Minimum distance S
Electric hob	450 mm
Electric grill, deep fat fryer (electric)	650 mm
Multi-burner gas hob, total output ≤ 12.6 kW, no burner > 4.5 kW	650 mm
Multi-burner gas hob, total output > 12.6 kW and ≤ 21.6 kW, no burner > 4.8 kW.	760 mm
Multi-burner gas hob, total output > 21.6 kW, or multi-burner gas hob where one burner > 4.8 kW.	Not possible
Single burner gas hob, output ≤ 6 kW.	650 mm
Single burner gas hob, output > 6 kW and ≤ 8.1 kW.	760 mm
Single burner gas hob, output > 8.1 kW	Not possible


Installation recommendations

– We recommend a minimum distance of 700 mm and a maximum distance of 1300 mm.

– Please be aware that if positioned too high, extraction will be inefficient.

– To achieve optimum vapour extraction, the cooker hood must cover the hob. It should be positioned centrally over the hob, not to the side or to the back of it.

– The hob should be no wider than the cooker hood, and if possible, it should be narrower.

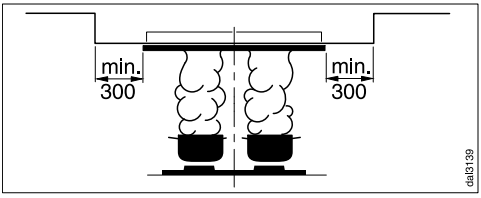

– If the cooker hood is being installed in a suspended ceiling, the installation surface all around the cooker hood must be at least 300 mm larger than the cooker hood itself.

– The installation area must be easily accessible. The cooker hood should be easily accessible and easy to dismantle in the event that service is required. This should be taken into consideration when planning the position of cupboards, shelves, ceilings or features in the vicinity of the cooker hood.

Connection for air extraction

⚠ If the cooker hood is used at the same time as a heating appliance that relies on oxygen from the same room, there is a risk in certain circumstances of toxic fumes building up.

It is essential that the "Warning and Safety" instructions are observed.

The cooker hood should be installed according to local and national building regulations. Seek approval from the building inspector where necessary.

- Use smooth or flexible ducting made from approved non-flammable materials for exhaust ducting.
- When using an external motor, make sure that the exhaust ducting is sufficiently rigid. The external motor can cause an underpressure which can result in the exhaust ducting distorting.
- To achieve the most efficient air extraction with the lowest noise levels, please note the following:

– To ensure efficient air extraction, the diameter of the exhaust ducting should not be less than 150 mm.

– If flat ducting is being used, the cross section must not be smaller than the cross sectional area of the exhaust socket.

– The exhaust ducting should be as short and straight as possible.


– Only use wide radius bends.

– The exhaust ducting must not be kinked or compressed.

– Ensure that all connections are strong and airtight.


Remember that any constriction of the air flow will reduce extraction performance and increase operating noise.

- If the exhaust is ducted through an outside wall, a telescopic wall vent or a roof vent (available as an optional accessory) is recommended.

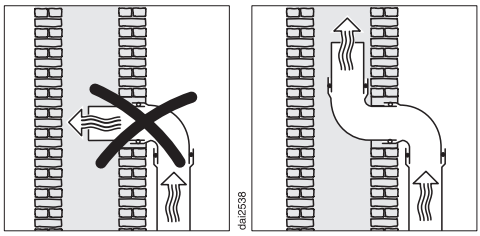


- If the exhaust air is to be ducted into a flue, the ducting must be directed in the flow direction of the flue.
- When ducting is horizontal it must be laid to slope away at at least 1 cm per metre. This is to ensure that condensate cannot drain back into the appliance.
- If the exhaust ducting is to run through rooms, ceiling space etc. where there may be great variations in temperature between the different areas, the problem of condensation will need to be addressed. The exhaust ducting will need to be suitably insulated.

Silencer

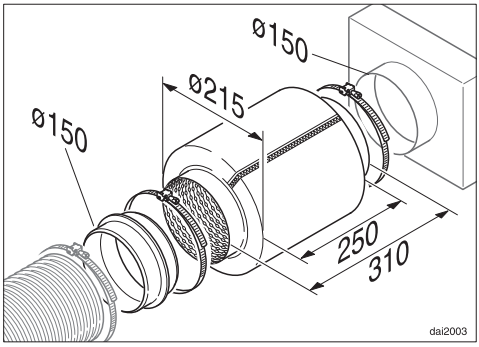


To achieve even further reductions in noise levels, a special silencer (optional accessory) can be fitted in the ducting system.

Extraction mode

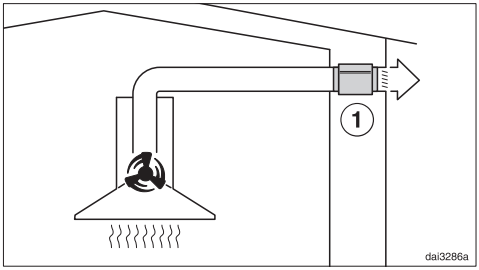

The silencer not only reduces noise from the motor outside the house, but also sounds from outside (e.g. traffic noise). For this reason the silencer must be positioned as close as possible to the ducting exit ①.

Extraction mode with external motor

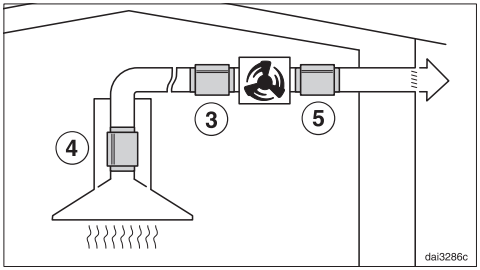

To minimise noise from the motor in the kitchen, the silencer should be positioned in front of the external motor ③ if possible, or, if the ducting is long, above the exhaust socket on the cooker hood ④. In the case of an external motor located inside the house, fitting a silencer behind the external motor ⑤ reduces the noise of the motor outside the house.

Electrical connection

All electrical work should be undertaken by a suitably qualified and competent person in strict accordance with current national and local safety regulations (BS 7671 in the UK).
Installation, repairs and other work by unqualified persons could be dangerous, for which the manufacturer cannot be held liable.
Ensure power is not supplied to the appliance until after installation or repair work has been carried out.
Do not connect the appliance to the mains electricity supply by an extension lead. These do not guarantee the required safety of the appliance.

The connection data is given on the data plate. This is visible when the grease filters have been removed. Ensure that this data matches the household mains supply.

Connection of this appliance should be made via a suitable isolator or a double pole fused spur connection unit which complies with national and local safety regulations and the On/Off switch should be easily accessible after the appliance has been built in. When switched off there must be an all-pole contact gap of 3 mm in the switch (including switch, fuses and relays according to EN 60335).

If the switch is not accessible after installation (depending on country), an additional means of disconnection must be provided for all poles.
For extra safety it is advisable to protect the appliance with a suitable residual current device (RCD). Contact a qualified electrician for advice.

Important
This appliance is supplied for connection to an a.c. 230 V single phase 50 Hz supply. The wires in the mains lead are coloured in accordance with the following code:

Green/yellow .....earth

Blue.....neutral

Brown .....live

WARNING:
THIS APPLIANCE MUST BE EARTHED

If a flexible connection cable is being used to connect the appliance to the electricity supply, the cross-sectional area of the the individual leads must be between 0.75 mm^2 and 1.5 mm^2.

Installing the Con@ctivity 2.0 Stick

In order to use the Con@ctivity 2.0 function, the hob must first be fitted with the Con@ctivity 2.0 Stick.

- Please read the separate installation instructions supplied with the Con@ctivity 2.0 Stick.

Activating Con@ctivity 2.0

Wireless connection must be activated between the hob and the cooker hood before the Con@ctivity 2.0 function can be used.

Both appliances must be installed and operational.

Wireless connection must be activated on the cooker hood and the hob at the same time. Activation on the cooker hood is described below.
Activation on the hob is described in the relevant Operating and installation instructions. Please refer to the Operating instructions before starting. Activate the cooker hood first, then the hob.

Activating the cooker hood

This is only possible via the cooker hood control panel, not via the remote control.

- The hob and cooker hood must be switched off.
- Press the run-on option control **5 15** for approx. 10 seconds until the indicator for power level **1** lights up.
- Then press in turn,

– the "—" control,

– then the "+" control,

– then the lighting control ☼.

If the remote control is already activated, **2** and **3** will light up constantly. If there is no wireless connection **2** and **3** will flash at the same time.

- To activate Con@ctivity 2.0, press the "+" control.

The search for a signal will start.

- Meanwhile, start activating the hob.

Activating Con@ctivity 2.0

Activating the hob

- **While** the cooker hood is searching for a signal, start activating the hob. More information about this can be found in the Operating instructions for the hob.
- When the hob registers that connection has been established, confirm activation on the cooker hood with the run-on option control **5** **15**. All indicators will go out.
- Confirm activation on the hob.

Con@ctivity 2.0 is now ready to use.

If you do not confirm within 4 minutes, activation will not take place.

You only need to carry out the activation procedure once. If the appliances are disconnected from the electricity supply, during a power cut for example, they will still remain activated.

Activation failed

- If connection cannot be established despite activating the Con@ctivity function on the cooker hood and hob, the function must be deactivated on both appliances and then the procedure repeated.

Deactivating Con@ctivity 2.0

- Deactivation on the cooker hood is carried out in the same way as activation, by selecting "—" instead of "+".
- To deactivate the hob, please refer to the Operating instructions supplied with it.

Please bear in mind that disabling the signal will also disable any remote control function and this will have to be activated again.

If the connection has been lost between the remote control and the cooker hood, they must be signed on again. To do this, the remote control function on the cooker hood and the remote control must be signed off first of all.

Signing on and off must be done at the same time on the cooker hood and the remote control. Signing on/off mode has to be accessed on the cooker hood first, then on the remote control.

To access Signing on/off mode on the cooker hood

- Press the run-on option control **5 15** for approx. 10 seconds until the indicator for power level **1** lights up.
- Then press in turn,

– the "—" control,

– then the "+" control,

– then the lighting control ☼.

- Then access the Signing on/off mode on the remote control immediately.

To access Signing on/off mode on the remote control

- Press both arrow controls ∨∧ at the same time and hold for about 5 seconds until the remote control LED flashes.
- Press the lighting control ☼.

To sign off

- In Signing on/off mode press the "—" control on the cooker hood and then on the remote control.

The remote control LED will flash steadily.

After approx. 10 seconds the remote control LED will flash on and off twice with a longer interval between the flashes. The remote control has now been signed off. The LED will go out after a short while.

- Confirm the signing off procedure by pressing the run-on option control **5 15** on the cooker hood. All indicators will go out.

Please bear in mind that disabling the signal will also disable any Con@ctivity 2.0 function and this will have to be activated again.

To start the signing on procedure

- In Signing on/off mode press the "+" control on the cooker hood **first** and then on the remote control.

The search for a signal will commence. The remote control LED will flash steadily.

After approx. 30 seconds the remote control LED will flash on and off 4 times at short intervals. The connection has been established. The LED will go out after a short while.

- Confirm signing on with the cooker hood run-on option control **5 15**. All indicator lights will go out.

The remote control can now be used.

If you do not confirm your selection within 4 minutes, activation will not take place.

To cancel the signing on procedure

- If it is not possible to sign on the procedure can be cancelled by pressing the run-on option control **5 15** on the cooker hood and on the remote control.
- The signing on procedure must then be repeated. To do this the cooker hood and the remote control must first be signed off.

In the event of a fault which you cannot remedy yourself, please contact your Miele dealer or the Miele Service Department.

Contact details for Miele are given at the back of this manual. N.B. A call-out charge will be applied to service visits where the problem could have been resolved as described in these instructions.

When contacting your dealer or Miele, please quote the model and serial number of your appliance.
These are shown on the data plate.

Position of the data plate

The data plate is visible after removing the grease filters.

Guarantee: U.K.

In the U.K., the appliance is guaranteed for 2 years from the date of purchase. However, you must activate your cover by calling 0330 160 6640 or registering online at www.miele.co.uk.

Guarantee: Other countries

For information on the appliance guarantee specific to your country please contact Miele. See end of this booklet for contact details.

Technical data

Fan motor*	130 W
Hob lighting	4 x 3 W
Total connected load*	142 W
Voltage, frequency	AC 230 V, 50 Hz
Fuse rating	5 A
Weight	
DA 2906	25 kg
DA 2906 EXT	22 kg

* For EXT models, the connected load and extraction power will depend on the type of external motor fitted.
Length of connection cable to external motor: 1.85 m
The DUU 2900 recirculation unit (optional accessory) is required for recirculation mode.

Conformity declaration

Miele hereby declares that the cooker hoods listed at the end of this booklet comply with the basic requirements and other relevant regulations of Guideline 1999/5/EC.

A copy of the full Declaration of Conformity can be obtained from the address at the end of this booklet.

Data sheet for household cooker hoods

In acc. with delegated regulation (EU) No. 65/2014 and regulation (EU) No. 66/2014

MIELE	
Model name / identifier	DA 2906
Annual Energy Consumption (AEC_{hood})	36,1 kWh/year
Energy efficiency class	
A+ (most efficient) to F (least efficient)	A+
Energy efficiency index (EEI_{hood})	44,4
Fluid Dynamic Efficiency (FDE_{hood})	36,3
Fluid Dynamic Efficiency class	
A (most efficient) to G (least efficient)	A
Lighting Efficiency (LE_{hood})	16,7 lx/W
Lighting Efficiency class	
A (most efficient) to G (least efficient)	C
Grease Filtering Efficiency	59,6 %
Grease Filtering Efficiency class	
A (most efficient) to G (least efficient)	E
Airflow at best efficiency point	447,1 m^3/h
Air flow (min. speed)	220 m^3/h
Air flow (max. speed)	450 m^3/h
Air flow (intensive or boost setting)	740 m^3/h
Max. air flow (Q_{max})	740 m^3/h
Air pressure at best efficiency point	316 Pa
Airborne acoustical A-weighted sound power emissions (min. speed)	42 dB
Airborne acoustical A-weighted sound power emissions (max. speed)	57 dB
Airborne acoustical A-weighted sound power emissions (intensive or boost setting)	69 dB
Electrical power input at best efficiency point	108,0 W
Power consumption in off mode (P_o)	W
Power consumption in standby mode (P_s)	0,15 W
Nominal power of lighting system	12,0 W
Average illumination of the lighting system on the cooking surface	200 lx
Time increase factor	0,7

Technical data

Data sheet for household cooker hoods

In acc. with delegated regulation (EU) No. 65/2014 and regulation (EU) No. 66/2014

MIELE	
Model name / identifier	DA 2906 EXT
Annual Energy Consumption (AEC_{hood})	8,8 kWh/year
Energy efficiency class	
A+ (most efficient) to F (least efficient)	A+
Energy efficiency index (EEI_{hood})	40,0
Fluid Dynamic Efficiency (FDE_{hood})	
Fluid Dynamic Efficiency class	
A (most efficient) to G (least efficient)	-
Lighting Efficiency (LE_{hood})	16,7 lx/W
Lighting Efficiency class	
A (most efficient) to G (least efficient)	C
Grease Filtering Efficiency	%
Grease Filtering Efficiency class	
A (most efficient) to G (least efficient)	-
Airflow at best efficiency point	m^3/h
Air flow (min. speed)	m^3/h
Air flow (max. speed)	m^3/h
Air flow (intensive or boost setting)	m^3/h
Max. air flow (Q_{max})	m^3/h
Air pressure at best efficiency point	Pa
Airborne acoustical A-weighted sound power emissions (min. speed)	dB
Airborne acoustical A-weighted sound power emissions (max. speed)	0 dB
Airborne acoustical A-weighted sound power emissions (intensive or boost setting)	dB
Electrical power input at best efficiency point	W
Power consumption in off mode (P_o)	W
Power consumption in standby mode (P_s)	0,15 W
Nominal power of lighting system	12,0 W
Average illumination of the lighting system on the cooking surface	200 lx
Time increase factor	

United Kingdom
Miele Co. Ltd.
Fairacres, Marcham Road
Abingdon, Oxon, OX14 1TW
Customer Contact Centre Tel: 0330 160 6600
E-mail: mielecare@miele.co.uk
Internet: www.miele.co.uk

Australia
Miele Australia Pty. Ltd.
ACN 005 635 398
ABN 96 005 635 398
1 Gilbert Park Drive, Knoxfield, VIC 3180
Tel: 1300 464 353
Internet: www.miele.com.au

China
Miele (Shanghai) Trading Ltd.
1-3 Floor, No. 82 Shi Men Yi Road
Jing' an District
200040 Shanghai, PRC
Tel: +86 21 6157 3500, Fax: +86 21 6157 3511
E-mail: info@miele.cn, Internet: www.miele.cn

Miele (Hong Kong) Limited
41/F - 4101, Manhattan Place
23 Wang Tai Road
Kowloon Bay, Hong Kong
Tel: (852) 2610 1331, Fax: (852)2610 1013
Email: mielehk@miele.com.hk

India
Miele India Pvt. Ltd.
Ground Floor, Copia Corporate Suites
Plot No. 9, Jasola
New Delhi - 110025
Tel: 011-46 900 000, Fax: 011-46 900 001
E-mail: customercare@miele.in, Internet: www.miele.in

Ireland
Miele Ireland Ltd.
2024 Bianconi Avenue
Citywest Business Campus, Dublin 24
Tel: (01) 461 07 10, Fax: (01) 461 07 97
E-Mail: info@miele.ie, Internet: www.miele.ie

Manufacturer: Miele & Cie. KG
Carl-Miele-Straße 29, 33332 Gütersloh, Germany

Miele

Malaysia
Miele Sdn Bhd
Suite 12-2, Level 12
Menara Sapura Kencana Petroleum
Solaris Dutamas No. 1, Jalan Dutamas 1
50480 Kuala Lumpur, Malaysia
Phone: +603-6209-0288
Fax: +603-6205-3768

New Zealand
Miele New Zealand Limited
IRD 98 463 631
Level 2, 10 College Hill
Freemans Bay, Auckland 1011, NZ
Tel: 0800 464 353
Internet: www.miele.co.nz

Singapore
Miele Pte. Ltd.
163 Penang Road
04 - 03 Winsland House II
Singapore 238463
Tel: +65 6735 1191, Fax: +65 6735 1161
E-Mail: info@miele.com.sg
Internet: www.miele.sg

South Africa
Miele (Pty) Ltd
63 Peter Place, Bryanston 2194
P.O. Box 69434, Bryanston 2021
Tel: (011) 875 9000, Fax: (011) 875 9035
E-mail: info@miele.co.za
Internet: www.miele.co.za

United Arab Emirates
Miele Appliances Ltd.
P.O. Box 11 47 82
Gold & Diamond Park, Sheikh Zayed Road
Building 6 / Offices Nos. 6-214 to 6-220
Dubai
Tel: +971-4-341 84 44
Fax: +971-4-341 88 52
E-Mail: info@miele.ae
Internet: www.miele.ae

Miele

DA 2906
DA 2906 EXT

CE

en-GB

M.-Nr. 10 093 450 / 01